

LIGHTING SOLUTION



TAREEQ AL YARMOOK LIGHTING EQUIP. TR

ABOUT US

Tareeq Al Yarmook Lighting Equip. Tr. today offers not only innovative luminaires for indoor and outdoor applications but also perfectly matching lighting solutions for all requirements. LED technology has long become standard. It outperforms nearly all conventional light sources in terms of service life, energy efficiency and luminous efficiency and has thus become indispensable for indoor and outdoor applications. However, only the combination of light source, optic, control system and housing enables optimal solutions for customers. Over and over again we discover in conversations with our customers that there is partly a high level of uncertainty how to interpret established definitions with LED technology or what exactly has to be considered when planning with LED. We at **Tareeq Al Yarmook Lighting Equip. Tr.**, would like to facilitate your daily work and bring you up-to-date when it comes to LED. We aim to communicate basic information as well as to promote a common understanding of LED lighting. Be inspired by our latest LED solutions for Office, Education, Health & Care, Industry, Shop & Retail and Outdoor applications.

MISSION

Our mission is to be the leading provider of innovative, environmentally-friendly, top-quality fixtures and related products retail and hospitality markets. As a recognized lighting manufacturer it is our responsibility to deliver superior value to our customers and their clients on a consistent basis. This commitment permeates everything we do, driving us to continuously develop and improve our products and the processes necessary to fulfill today's needs for high quality, energy-efficient, eco-friendly lighting solutions.

OUR VALUES

Tareeq Al Yarmook Lighting Equip.Tr, Offers a diverse range of products for indoor as well as for outdoor purposes, with various designs and models to suit all your requirements. What's more, at Edison Led Lighting we are very well equipped to custom build lighting design, solutions and fittings for every environment. Solutions that give the right illumination experience to make people feel comfortable, safe and more



LED PANEL LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Commercial, Office, Hospital, Supermarket.
- Installation: Recessed, Ceiling mounted and Suspension

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; UGR< 19/16available;
- Tridonic/Philips/Osram Driver available;
- Triac/0-10V/Dali dimmable available
- Lume: 100 or 120LM/W;
- Material: Aluminum Body + PS/MS/PMMA diffusers




ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15% Emergency 1.5hs/3hs Available

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35°C ~ +55°C operating temperature
- -20°C ~ +60°C storage temperature

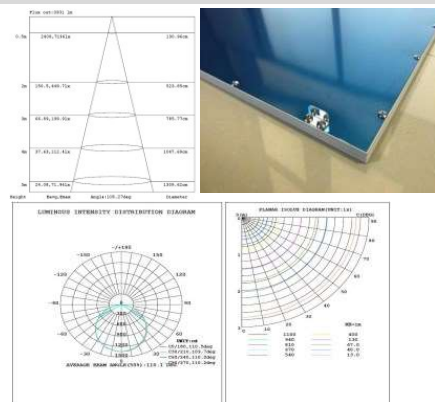

TAY-PL-CE (Side light)	TAY-PL-CEB (Backlist)	TAY-PL-CEBA (Side light)	TAY-PLSB (Sqaure)	TAY-PL-IP65
TAY-PL-UD	TAY-PL-CCT	TAY-PL-RGB	TAY-PL-Frame	TAY-PL-dot
TAY-PL-Round	TAY-PL-Round-R	TAY-PL-Round-S	TAY-PL-RoundAA	TAY-EDGE
TAY-GPLSE	TAY-GPLSEA	TAY-TLA	TAY-PLRB	TAY-TL



LED DOWN & SPOT LIGHT

LISTINGS


- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bathroom
- Installation: Recessed, Surface Mounted and Suspension.

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP20 44 65
- Triac/CCT/1-0V/DALI dimmable available;
- Lume: 100/120 LM/W;
- Material: Die-case Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 12/24/38/45/60/90/120degree
- Honeycomb available;
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

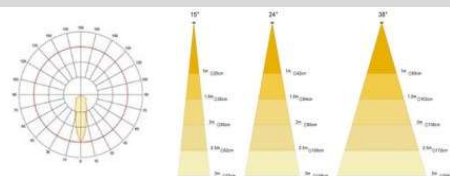


CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



TAY-DL01	TAY-DL02	TAY-DL03	TAY-DL04	TAY-DL05	TAY-DL06SQ	TAY-DL07	TAY-DL09	TAY-DLL30	TAY-DLLA6
TAY-DLSMD	TAY-DLL4B	TAY-DL10	TAY-DL11	TAY-DL12	TAY-DL13-12	TAY-DLL24C	TAY-DLL24B	TAY-DLLSE	TAY-DLL47
TAY-DLL31	TAY-DLL32	TAY-DLL34	MDL-RLDL2	MDL-RLDL3	MDL-RLRDL4C	MDL-RLRDL24C	TAY-DLL42	MDL-RLDL1	TAY-DLL36
TAY-DLL12	TAY-DLL14	TAY-DLL15	TAY-DLL13	TAY-DLL6	TAY-DLL27	TAY-DLL33	TAY-DLL38	TAY-DLLA3	TAY-DLL9

									
TAY-RDL12	TAY-RDL19	TAY-RDL18	TAY-RDL17	TAY-RDLA7	TAY-RDLA4	TAY-RDL18A	TAY-RDL40	TAY-RDL39	TAY-RDL41
									
TAY-RDL	TAY-RDL18A	TAY-RSDL15	TAY-RDLRSDL1	TAY-RDL15A	TAY-RDL5A	TAY-STAY5A5	TAY-RDL4D	TAY-RDLSE2	TAY-RDLSE3
									
TAY-MINI1	TAY-MINI2	TAY-MINI3	TAY-MINI4	TAY-MINI5	TAY-MINI6	TAY-MINI7	TAY-MINI8	TAY-MINI9	TAY-MINI10
									
TAY-MINI11	TAY-MINI12	TAY-MINI13	TAY-MINI14	TAY-MINI15	TAY-MINI16	TAY-RDL48	TAY-RDL44	TAY-RDL43	TAY-SDL1
									
TAY-RDL7A	TAY-RDL7B	TAY-RDL35	TAY-RDL45	TAY-RDL45S	TAY-SDL2	TAY-RDL8	TAY-LDL2	TAY-RDLT2	TAY-RDL8C
									
TAY-ADL	TAY-ADL1	TAY-ADL2	TAY-ADL3	TAY-STAY9	TAY-STAY7	TAY-STAY8	TAY-STAY5A	TAY-STAY1	TAY-STAY
									
TAY-STAY5	TAY-STAY3	TAY-STAY5B	TAY-STAY10	TAY-STAY11	TAY-STAY12	TAY-STAY13	TAY-STAY14	TAY-STAY15	TAY-DXDL
									
TAY-STAYA	TAY-SMGDL1	TAY-STAY2	TAY-RDL8D	TAY-SMGDL3	TAY-SMGDL4	TAY-SMGDL2	TAY-SMGDL5	TAY-SDL3	TAY-RDL46
									
TAY-GDL1	TAY-GDL12	TAY-GDL11	TAY-GDL	TAY-GDL13	TAY-GDL14	TAY-GDL15	TAY-GDL16	TAY-GDL17	TAY-GDL18
									
TAY-WDL	TAY-WDL2	TAY-WDL4	TAY-WDL5	TAY-WDL5A	TAY-WDL8	TAY-WDL12	TAY-WDL7	TAY-WDL8	TAY-WDL9
									
TAY-WDL5	TAY-WDL10	TAY-WDL11	TAY-WDL3	TAY-WDL6	TAY-WDL12	TAY-WDL13	TAY-WDL14	TAY-WDL15	TAY-GQD7
									
TAY-WDL5	TAY-WDL10	TAY-WDL11	TAY-WDL3	TAY-WDL6	TAY-WDL12	TAY-WDL13	TAY-WDL14	TAY-WDL15	TAY-GQD7



LED CEILING LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bedroom, live room and so on
- Installation: Surface Mounted and Suspension.

PERFORMANCE

- Rated lifetime L80: 30,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP20/65
- Triac/CCT dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum or ABS +PC Cover;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Micro-wave sensor, Motion sensor or Emergency available;
- Beam angle: 120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature .
- -20℃ ~ +60℃ storage temperature



TAY-DONA	TAY-CL2(IP44)	TAY-CL5(IP44) Rectangle&Square Shape	TAY-CL5A(IP44) Rectangle&Square Shape	TAY-CL7(IP44)
TAY-CL3(IP65)	TAY-CL6(IP65)	TAY-CL12(IP65)	TAY-WCL3(IP65) Round&Square Shape	TAY-CL21(IP44)
TAY-WCL4(IP65)	TAY-WCL2	TAY-WCL13	TAY-CL14(IP65)	TAY-WCL5



LED CHANDELIER & PANDENT LIGHT

				
80122	21013	3600	80123	30088
				
8001	8004	8005	80123	803/3P
				
80122	9302	9001	6066	6670
				
7009	7003	6005	6660	6665
				
7005	7004	7002	7007/1PBKGD	001/1PWH



LED MIRROR LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bathroom
- Installation: Surface Mounted.

PERFORMANCE


- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP54
- Triac/CCT dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum or Plastic;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature .
- -20℃ ~ +60℃ storage temperature

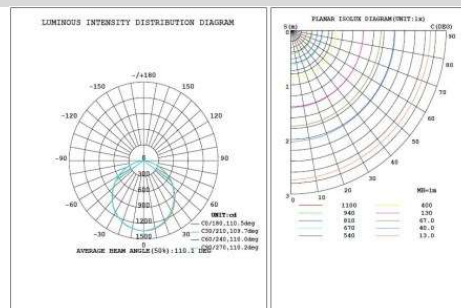

TAY-ML1	TAY-2	TAY-ML14	TAY-9	TAY11
TAY-ML18	TAY-ML19	TAY-ML20	TAY-ML21	TAY-ML22
TAY-ML23	TAY-ML15	TAY-ML16	TAY-ML13	TAY-ML17
TAY-ML24	TAY-ML25	TAY-T8	TAY-ML28	TAY-ML26



LED TRACK LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bathroom
- Rail Installation: Recessed, Surface Mounted and Suspension.
- Track Installation: Track Rail 2Wire 3Wire 4Wire

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- CCT 3000-6500K ;
- CRI: 80 ; IP: IP44
- Triac/DALI/1-10V dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 12/24/38/45/60/90/120degree
- Honeycomb available;
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



TAY-TK3	TAY-TK4	TAY-TK5	TAY-TK6	TAY-TK7	TAY-TK8	TAY-TK9	TAY-TK10	TAY-TK11	TAY-TK12
TAY-TK13	TAY-TK14	TAY-TK16	TAY-TK17	TAY-TK18	TAY-TK21	TAY-TK22	TAY-TK23	TAY-TK24	TAY-TK25
2 Wire	3 Wire	4 Wires (3 Phase) Recessed	4 wires (3 Phase) Surface	4 wires (3 Phase) Round	Feeder-L	Feeder-R	Straight Connector	Mini Straight Connector	X-Connector
								Can custom-made any size Track Rail	
T-Connector -L	T-Connector -R	L-Connector -L	L-Connector -R	Flexible Connector	90° Connector	End-cap	Hanging wire	2 wires Track 3 wires Track 4 wires Track 6 wires Track	



MAGNETIC LED TRACK LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bathroom
- Rail Installation: Recessed, Surface Mounted and Suspension.
- Track Installation: Magnetic.

PERFORMANCE


- Rated lifetime L80: 50,000 hours
- CCT 3000-6500K ;
- CRI: 80 ; IP: IP20
- Triac/DALI/1-10V dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: DC48V
- Beam angle: 12/24/38/45/60/90/120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%


CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

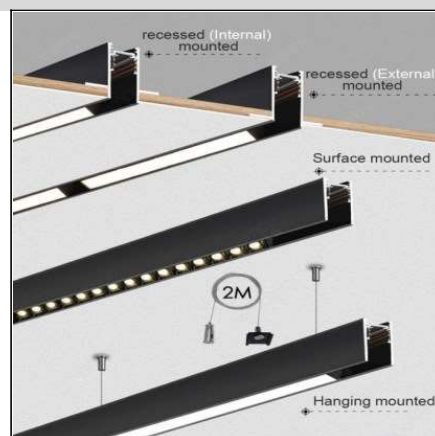

TAY-TKM1	TAY-TKM2	TAY-TKM3	TAY-TKM4	TAY-TKM4	TAY-TKM5	TAY-TKM7
TAY-TKM8	TAY-TKM9	TAY-TKM6	TAY-TKM10	TAY-TKM11	TAY-TKM12	TAY-TKM13
Driver Connector	Corner Connector	180° Connector	Connector	Level L connector	Vertical L connector	Level vertical L connector
Surface Level L connector	T Connector	T Connector	T Connector	T Connector	T Connector	T Connector
Surface Rail	Recessed	Recessed External	Recessed Internal	Hanging wire	Round Rail	Curve Light
Curve Rail	Integration Driver	Driver	Driver	Driver	Driver	Driver



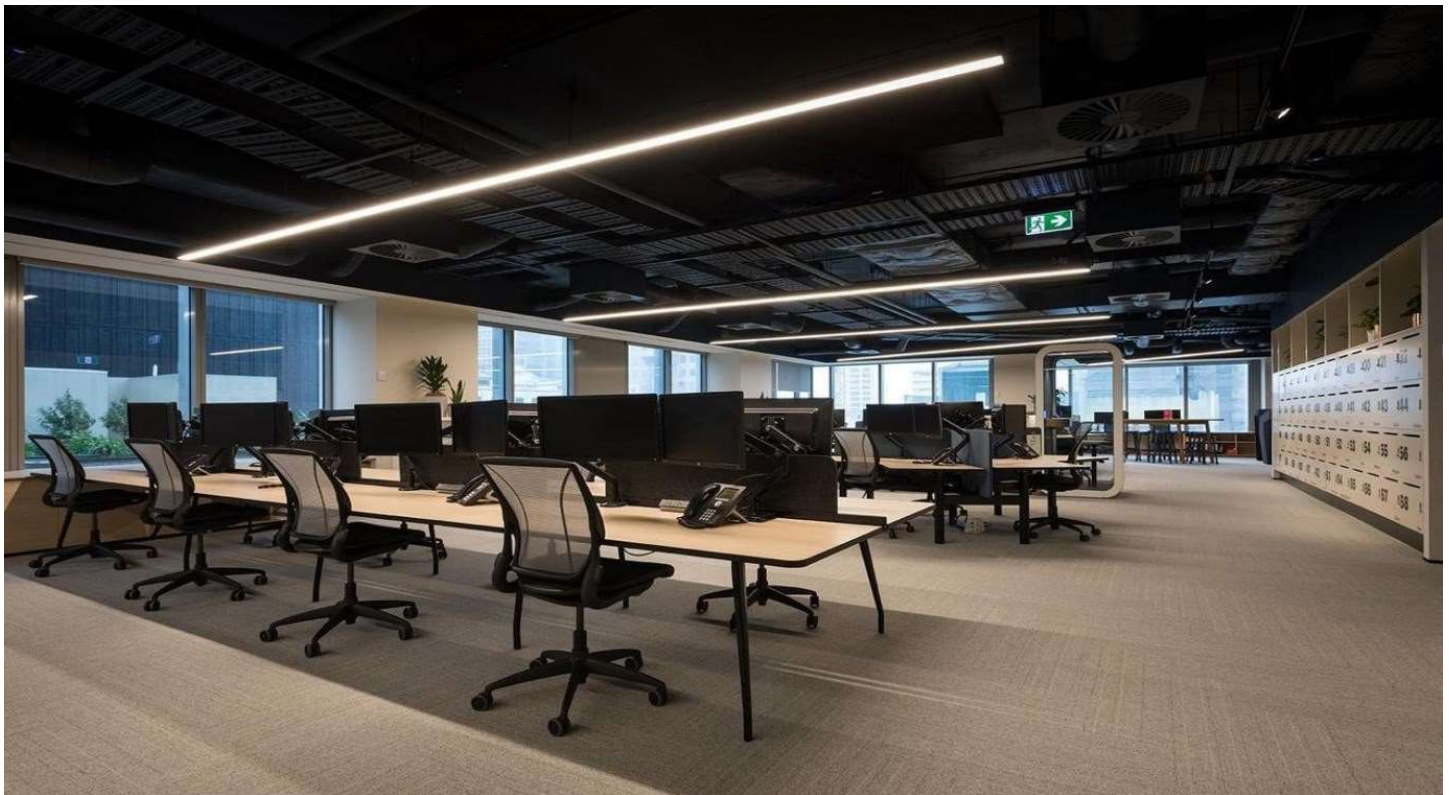

LED LINEAR LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Commercial, Office, Hospital, Supermarket.
- Installation: Recessed, Surface and Suspension.

PERFORMANCE



- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; Anti-glare available; Emergency 1.5hs/3hs Available
- Tridonic/Philips/Osram Driver available;
- Triac/0-10V/Dali dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 30/60/90/120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

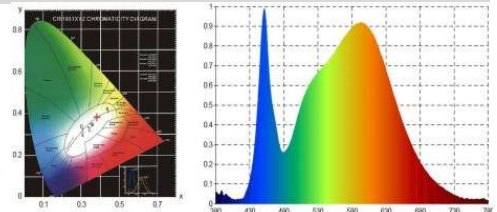

TAY-LLA(Work Supermarket and Warehouse)	TAY-LLB	TAY-LLC	TAY-LLBSX	TAY-LLF(Have 9 Type)
TAY-LLD(Seamless Connection)	TAY-LLE(Economy)	TAY-LLE1	TAY-LLE2(Seamless Connection, Stitching Inside)	TAY-LLE2(Seamless Connection, External Stitching)
TAY-LLHX(Seamless Connection)	TAY-LLYX	TAY-LLSM(Three Side Lighting)	TAY-LLER	TAY-LLERA



LED TRI-PROOF LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: MTR station, Train station, Bus station, Underground Parking Lot, Airport, Factory and Warehouse.
- Installation: Surface Mounted and Suspension.

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Tridonic/Philips/Osram Driver available;
- Triac/0-10V/Dali dimmable available;
- Lume: 120 LM/W;
- Material: Aluminum or Plastic;

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Micro-wave sensor, Emergency available;
- Beam angle: 120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION


- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



Push Dim



Color temperature adjustable



Microwave sensor

TAY-SF-1(Economy)	TAY-SF-1A	TAY-SF-4	TAY-SF-1A-SS	TAY-SF-2
TAY-SF-2A	TAY-SF-2B	TAY-2AR	TAY-SF-2C	TAY-SF-2D
TAY-SF-3A	TAY-SF-3B	TAY-SF-7	TAY-SF-5Z	TAY-SF-6



LED WALL LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Bathroom
- Rail Installation: Recessed, Surface Mounted and Suspension.
- Track Installation: Track or Magnetic.

ELECTRICAL

- Input Voltage: AC220-240V 50/60Hz
- Beam angle: 12/24/38/45/60/90/120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%


PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/CCT/DALI/1-10V dimmable available;
- Lume: 100/120 LM/W;
- Material: Aluminum;

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -20℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

									
TAY-OWLA	TAY-OWLQ	TAY-OWLQS	TAY-OWLT	TAY-OWLS	TAY-OWL7	TAY-OWLP	TAY-OWL8	TAY-OWLR	TAY-OWL4
									
TAY-OWLM	TAY-OWL9	TAY-OWLN	TAY-OWLTX	TAY-OWLY	TAY-OWLYA	TAY-OWLC	TAY-OWL30	TAY-OWL3	TAY-OWLB
									
TAY-OWL10	TAY-OWLH	TAY-OWLI	TAY-OWLE	TAY-OWLF	TAY-OWLG	TAY-OWLJ	TAY-OWLK	TAY-OWL11	TAY-OWLW
									
TAY-OWLU	TAY-OWLS	TAY-IWLE	TAY-IWLES	TAY-OWL12R	TAY-OWL12S	TAY-OWLX	TAY-OWLXA	TAY-OWLZ	TAY-OWLZA

									
TAY- FWLC	TAY- FWLCA	TAY- FWLB	TAY- FWLD	TAY- FWL2	TAY- FWLA	TAY- FWL1	TAY- OWL1		TAY- OWLZD
									
TAY-OWL20	TAY-OWL21	TAY-OWL16	TAY-OWL22	TAY-OWL23	TAY-OWL24	TAY-OWL25	TAY-OWL26	TAY-OWL27	TAY- OWLL
									
TAY- OWL13	TAY- OWL13A	TAY- OWL13B	TAY- OWL13C	TAY- OWL15	TAY- OWL15A	TAY- OWL15B	TAY- OWL15C	TAY- OWL2	
									
TAY- OWL14	TAY- OWL14A	TAY- OWL14B	TAY- OWL14C	TAY- OWL14D	TAY- OWLD	TAY- OWLXB	TAY- OWLXC	TAY- OWLZB	TAY- OWLZC
									
TAY- IWLC	TAY- IWLCT	TAY-OWL28	TAY-OWL17	TAY-OWL18	TAY-OWL34	TAY-OWL35	TAY-OWL36	TAY-OWL37	TAY-OWL38
									
TAY-OWL39	TAY-OWL40	TAY-OWL41	TAY-OWL42	TAY-OWL43	TAY-OWL44	TAY-OWL45	TAY-OWL26A	TAY-OWL46	TAY-OWL19
									
TAY-OWL47	TAY-OWL48	TAY-OWL49	TAY- IWLD	TAY-OWL50	TAY-OWL51	TAY-OWL52	TAY-OWL53	TAY-OWL54	TAY-OWL55
									
TAY-OWL26B	TAY-OWL26C	TAY-OWL26D	TAY-OWL26E	TAY-OWL26F	TAY-OWL26G	TAY-OWL56	TAY-OWL57	TAY-OWL58	TAY-OWL59
									
TAY-OWL60	TAY-OWL61	TAY-OWL62	TAY-OWL63	TAY-OWL64	TAY-OWL65	TAY-OWL66	TAY-OWL67	TAY-OWL68	TAY-OWL69
									
TAY- IWLJ	TAY-OWL31	TAY-OWL32	TAY- OWLV	TAY-OWL33	TAY-OWL70	TAY-OWL71	TAY-BLL75W	TAY-OWL72	TAY-OWL73
									
TAY-OWL74	TAY-OWL75	TAY-OWL76	TAY-OWL77	TAY-OWL78	TAY-OWL79	TAY-OWL80	TAY-OWL81	TAY-OWL82	TAY-OWL83



LED HIGH BAY LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Warehouse, stadiums, docks, industrial workshops, Warehouse, stadiums, docks, industrial workshops
- Installation: Surface Mounted or Hanging wire

PERFORMANCE



- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Motion sensor/Micro-wave sensor available;
- Lume: 100/120/150/160 LM/W;
- Material: Die-case Aluminum;

ELECTRICAL

- Input Voltage: AC85-265V/50/60Hz
- Beam angle: 60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature .
- -20℃ ~ +60℃ storage temperature

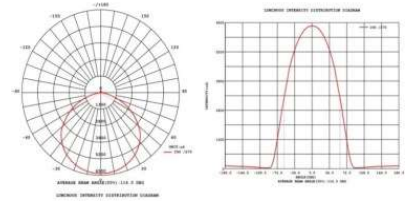

	MODEL TAY- HB(AH)		MODEL TAY- HB(BH)		MODEL TAY- HB(CH)		MODEL TAY- HB(DH)		MODEL TAY- HB(IH)
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
100W	Φ280*185mm	100W	Φ260*146mm	100W	Φ278*171mm	100W	Φ292*151mm	100W	Φ280*150mm
240W	Φ400*197mm	240W	Φ290*168mm	240W	Φ388*202mm	200W	Φ382*160mm	200W	Φ400*180mm
	MODEL TAY- HB(LH)		MODEL TAY- HB(GH)		MODEL TAY- HB(KH)		MODEL TAY- HB(JH)		MODEL TAY- HB(GH)-1
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
100W	Φ275mm	50W	Ø350*H252mm	50W	L266*116.78mm	50W	L353*115*144mm	60W	Φ440*H372mm
200W	Φ350mm	250W	Ø350*H402mm	400W	L794*241.42mm	500W	L1481*230*173mm	300W	Φ440*H485mm
	MODEL TAY- HB(FH)		MODEL TAY- HB(KH)		MODEL TAY- HB(MH)		MODEL TAY- HB(NH)		MODEL TAY- HB(OH)
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
400W	Φ439*419*456mm	50W	Φ250*H110MM	100W	Φ260*H140MM	80W	Φ490*H300MM	50W	Φ250*H150MM
540W	Φ439*419*456mm	240W	Φ400*H130MM	200W	Φ350*H140MM	250W	Φ490*H330MM	200W	Φ400*H150MM



LED FLOOD LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Installation: Surface Mounted With Bracket.

PERFORMANCE


- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP66
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100/120/150/160 LM/W;
- Material: Die-cast Aluminum;


ELECTRICAL

- Input Voltage: AC85-265V/50/60Hz
- Beam angle: 45/60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

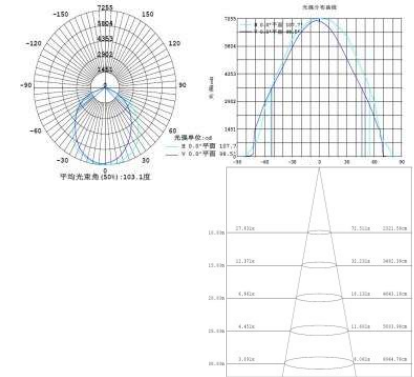

	MODEL		MODEL		MODEL		MODEL		MODEL
WATTAGE: 50W TO 200W		WATTAGE: 50W TO 200W		WATTAGE: 10W TO 800W		WATTAGE: 50W TO 800W		WATTAGE: 100W TO 400W	
	MODEL		MODEL		MODEL		MODEL		MODEL
WATTAGE: 20W TO 200W		WATTAGE: 100W TO 400W		WATTAGE: 10W TO 200W		WATTAGE: 10W TO 300W		WATTAGE: 100W TO 400W	
	MODEL		MODEL		MODEL		MODEL		MODEL
WATTAGE: 50W TO 200W		WATTAGE: 200W TO 600W		WATTAGE: 50W TO 500W		WATTAGE: 50W TO 1000W		WATTAGE: 100W TO 500W	
	MODEL		MODEL		MODEL		MODEL		MODEL
WATTAGE: 100W TO 500W		WATTAGE: 400W 500W		WATTAGE: 6W TO 54W		WATTAGE: 30W TO 800W		WATTAGE: 10W TO 100W	



LED STREET LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Street, Road, Highway, Garden, Park

PERFORMANCE



- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI dimmable/Photocell Sensor available;
- Lume: 100/120/150/160 LM/W;
- Material: Die-case Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz
- Beam angle: 60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

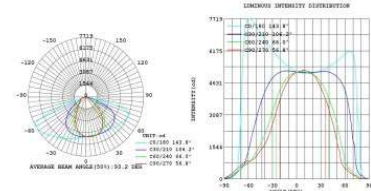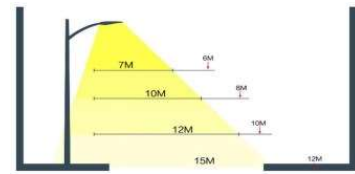

	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-STF		TAY-STG		TAY-SL		TAY-STB		TAY-STH	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
60W	520*212*90MM	60W	525*245*230MM	100W	422*310*132MM	50W	399*310*80MM	50W	558*200*115MM
240W	850*366*198MM	180W	625*335*240MM	300W	855*318*132MM	300W	884*310*80MM	200W	775*320*120MM
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-STL		TAY-STM		TAY-SBST		TAY-STN		TAY-STO	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
60W	540*360*110MM	50W	490*260*75MM	100W	550*320*80MM	100W	650*350*135MM	30W	380*120*56MM
250W	740*360*110MM	120W	710*260*75MM	300W	720*320*80MM	300W	970*350*135MM	200W	600*235*80MM
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-STP		TAY-STQ		TAY-STE		TAY-STC		TAY-STA	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
30W	328*115*55MM	30W	495*70*55MM	20W	366*135*85MM	30W	510*230*80MM	12W	350*95MM
120W	590*180*75MM	200W	772*280*90MM	150W	632*215*90MM	200W	950*360*80MM	120W	643*284MM



LED WALL WASHER LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Building, bridge
- Installation: Surface Mounted With Bracket.

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT, R/G/B/Y/RGB/RGBW;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100 LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz
- Beam angle: 8/12/24/38/45/60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



	MODEL TAY-WL1		MODEL TAY-WL11		MODEL TAY-WL12		MODEL TAY-WL11		MODEL TAY-WL15
WATTAGE 9W	SIZE(mm) L500*W46*H46MM	WATTAGE 72W	SIZE(mm) L1000*W70*H40MM	WATTAGE 36W	SIZE(mm) L330*W220*H160MM	WATTAGE 24W	SIZE(mm) L1000*W42*H57MM	WATTAGE 24W	SIZE(mm) L1000*W36*54MM
WATTAGE 288W	SIZE(mm) L1000*W103*H80MM	WATTAGE 108W	SIZE(mm) L1000*W95*H50MM	WATTAGE 144W	SIZE(mm) L930*W220*H160MM	WATTAGE 36W	SIZE(mm) L1000*W42*H57MM	WATTAGE 12W	SIZE(mm) L500*W36*54MM
	MODEL TAY-WL4		MODEL TAY-WL5		MODEL TAY-WL13		MODEL TAY-WL18		MODEL TAY-WL7
WATTAGE 12W	SIZE(mm) L1000*W36*H30MM	WATTAGE 12W	SIZE(mm) L1000*W24*H20MM	WATTAGE 36W	SIZE(mm) L1000*W54*H30MM	WATTAGE 15W	SIZE(mm) L1000*W28*H20MM	WATTAGE 15W	SIZE(mm) L1000*W35*H45MM
WATTAGE 36W	SIZE(mm) L1000*W36*H30MM	WATTAGE 24W	SIZE(mm) L1000*W24*H20MM	WATTAGE 48W	SIZE(mm) L1000*W54*H30MM	WATTAGE 24W	SIZE(mm) L1000*W28*H20MM	WATTAGE 24W	SIZE(mm) L1000*W35*H45MM
	MODEL TAY-WL9		MODEL TAY-WL14		MODEL TAY-WL17		MODEL TAY-WL6		MODEL TAY-WL16
WATTAGE 12W	SIZE(mm) L1000*W28*H30MM	WATTAGE 12W	SIZE(mm) L1000*W28*H30MM	WATTAGE 18W	SIZE(mm) L1000*W34*H20MM	WATTAGE 12W	SIZE(mm) L1000*W35*H25MM	WATTAGE 12W	SIZE(mm) L1000*W30*H38MM
WATTAGE 24W	SIZE(mm) L1000*W28*H30MM	WATTAGE 18W	SIZE(mm) L1000*W28*H30MM	WATTAGE 36W	SIZE(mm) L1000*W40*H25MM	WATTAGE 72W	SIZE(mm) L1000*W75*H50MM	WATTAGE 18W	SIZE(mm) L1000*W30*H38MM



LED BOLLARD LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz
- Beam angle: 120/360degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



		MODEL							
		TAY-BLL1							
WATTAGE	SIZE(mm)		TAY-BLL6	TAY-BLL2	TAY-BLL3	TAY-BLL4	TAY-BLL39	TAY-BLL5	TAY-BLL9
7W	H200MM								
10W	H600MM								
15W	H1000MM								
30W	H2500MM								
			TAY-BLL40	TAY-BLL41	TAY-BLL42	TAY-BLL43	TAY-BLL8	TAY-BLL10	TAY-BLL13
			TAY-BLL44	TAY-BLL44A	TAY-BLL44B	TAY-BLL45	TAY-BLL46	TAY-BLL47	TAY-BLL48



LED BOUNDRY WALL LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz
- Beam angle: 120/360degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

									
TAY-BLL31	TAY-BLL32	TAY-BLL33	TAY-BLL33B	TAY-BLL334	TAY-BLL68	TAY-BLL69	TAY-BLL35	TAY-BLL36	TAY-TWFL1
									
TAY-BLL37	TAY-BLL37A	TAY-BLL38	TAY-BLL70	TAY-BLL71	TAY-TWFL2	TAY-TWFL3	TAY-BLL75T	TAY-BLL75W	TAY-TWFL4
									
TAY-TWFL5	TAY-TWFL6	TAY-TWFL7	TAY-TWFL8	TAY-TWFL9	TAY-TWFL10	TAY-TWFL11	TAY-TWFL12	TAY-TWFL13	TAY-TWFL14
									
TAY-TWFL15	TAY-TWFL16	TAY-TWFL17	TAY-TWFL18	TAY-TWFL19	TAY-TWFL20	TAY-TWFL21	TAY-TWFL22	TAY-TWFL23	TAY-TWFL24



LED POLE LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Garden, Park, Path, Street

PERFORMANCE


- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP20
- Solar available;
- Lume: 100 LM/W;
- Material: Aluminum;

ELECTRICAL

- Input Voltage: AC85-265V 50/60Hz
- Beam angle: 360degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

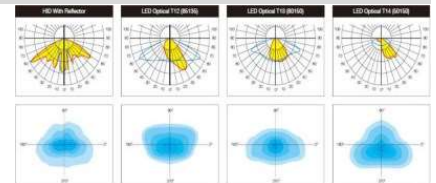



LED SPIKE LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Application: Garden
- Installation: Surface Mounted

PERFORMANCE


- Rated lifetime L80: 50,000 hours
- 3000-6500K CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100/120LM/W;
- Material: Die-case Aluminum;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz or DC12/24V
- Beam angle: 8/12/24/38/45/60/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

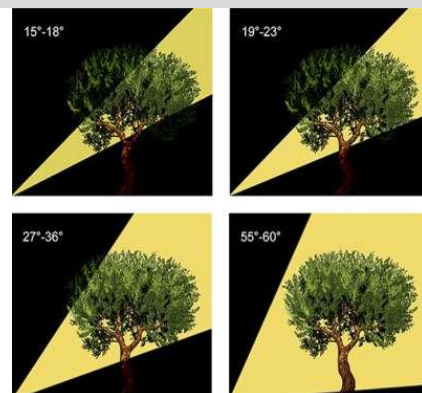

	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-SPL11		TAY-SPL13		TAY-SPL2		TAY-SPL4		TAY-SPL14	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
5W	D75*135MM	5W	D75*H250MM	6W	D75*H130MM	3W	D75*H100MM	3W	D80*H380MM
10W	D75*145MM	12W	D75*H250MM	48W	D290*H320MM	D36W	D233*H260MM	7W	D105*H430MM
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-SPL5		TAY-SPL15		TAY-SPL16		TAY-SPL17		TAY-SPL18	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
3W	D85*H265MM	10W	D80*H350MM	3W	D64*H364MM	7W	D65MM	3W	D42*H300MM
18W	D150*H400MM	30W	D140*H440MM	12W	D64*H364MM	15W	D75MM	10W	D68*H300MM
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-SPL19		TAY-SPL20		TAY-SPL21		TAY-SPL23		TAY-SPL24	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
7W	D90H355MM	9W	D105*H325MM	15W	D95*H180MM	12W	D105*H232MM	12W	D138*H200MM
12W	D90H355MM	36W	D150*H400MM	30W	D125*H250MM	15W	D105*H232MM	15W	D180*H237MM



LED INGROUND LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Installation: Recessed

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K, R/G/B/Y/RGB/RGBW CCT;
- CRI: 80 ; IP: IP65
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100/120LM/W;
- Material: Aluminum+Stainless steel+PVC;

ELECTRICAL

- Input Voltage: AC220-240V/50/60Hz Or DC12/24V
- Beam angle: 8/12/24/38/45/60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL		TAY-UDGL20		TAY-SUDGL		TAY-COBUDWL		TAY-AUDWLCOB	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
1W	D65*H80mm	3W	100*125mm	3W	100*100*70mm	3W	100*90mm	3W	100*145mm
15W	D180*H90mm	24W	210*145mm	16W	200*200*70mm	10W	120*90mm	30W	210*270mm
36W	D250*H90mm	36W	320*135mm	30W	300*300*H80mm	50W	300*120mm	50W	250*310mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-AUDGL		TAY-AUDWLCOB1		TAY-UDGL19		TAY-UDGL21		TAY-UDGL24	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
3W	115*132mm	10W	150*200mm	20W	250*280mm	3W	110*108mm	3W	120*100mm
15W	230*290mm	20W	180*240mm	30W	250*300mm	12W	150*110mm	7W	150*115mm
24W	250*310mm	50W	250*310mm	50W	250*390mm	30W	220*120mm	15W	180*125mm

	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL5		TAY-UDGL5A		TAY-UDGL5B		TAY-UDGL5C		TAY-UDGL6	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
15W	600*90*75mm	18W	1000*50*90mm	12W	1000*55*70mm	12W	1000*55*70mm	12W	1000*30*H75mm
24W	1000*90*75mm	24W	1000*50*90mm	18W	1000*70*90mm	18W	1000*70*90mm	15W	1000*45*H65mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL6A		TAY-AUDWLCOB1		TAY-UDGL5S		TAY-UDGL4		TAY-UDGLA	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
18W	1000*30*60mm	3W	100*100*60mm	15W	600*90*75mm	1W	42*85mm	1W	42*80mm
24W	1000*50*70mm	18W	1000*100*60mm	24W	1000*90*75mm	12W	175*145mm	5W	62*88mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL14		TAY-UDGL14A		TAY-UDGL14B		TAY-UDGL14C		TAY-UDGL25	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
1W	35*50mm	1W	35*50mm	1W	50*60mm	1W	36*53mm	1W	10*37mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL14S		TAY-UDWL1		TAY-UDGL2		TAY-UDGL13		TAY-UDGL22	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
1W	45*45*50mm	2W	145*72*55mm	2W	70*70*50mm	1W	58*58*50mm	5W	150*35mm
3W	45*45*50mm	9W	270*145*115mm	3W	170*70*50mm	3W	85*85*50mm	5W	150*150*35mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL8A		TAY-UDWL1A		TAY-UDGL12		TAY-UDGL11		TAY-UDGL8	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
2W	105*60mm	5W	250*70*90mm	3W	80*70mm	3W	185*35*30mm	2W	105*60mm
3W	210*60mm	3W	155*70*90mm	3W	80*80*70mm	1W	88*35*30mm	3W	210*60mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL26		TAY-UDGL23		TAY-UDGL3		TAY-UDGL21		TAY-UDGL31	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
1W	42*47mm	2W	100*35mm	3W	79*32mm	1W	42*50mm	10W	
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-UDGL27		TAY-UDGL28		TAY-UDGL29		TAY-UDGL12		TAY-UDGL30	
WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)	WATTAGE	SIZE(mm)
1W	90*90mm	1W	35*48mm	3W	70*71mm	3W	125*70mm	8W	130*85*80mm



LED UNDERWATER LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.
- Installation: Recessed or Surface

PERFORMANCE

- Rated lifetime L80: 50,000 hours
- 3000-6500K, R/G/B/Y/RGB/RGBW CCT;
- CRI: 80 ; IP: IP68
- Triac/1-10V/ DALI/DMX dimmable available;
- Lume: 100/120LM/W;

Material: Stainless steel;

ELECTRICAL

- Input Voltage: DC12/24V
- Beam angle: 8/12/24/38/45/60/90/120 degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature



MODEL

TAY-GUWL10

WATTAGE	BEAM ANGLE	SIZE(mm)
15W		270*91mm
18W		270*91mm
24W	15/30/45/60/120°	270*91mm
35W		270*91mm
50W		270*91mm



MODEL

TAY-SUWL



MODEL

TAY-DUWLA



MODEL

TAY-GUWL1

WATTAGE	BEAM ANGLE	SIZE(mm)	WATTAGE	BEAM ANGLE	SIZE(mm)	WATTAGE	BEAM ANGLE	SIZE(mm)
3W		82*H100mm	6W		135*H150mm	6W		150*H80mm
6W		120*H140mm	15W		190*H170mm	9W		170*H80mm
12W	8/15/25/30 /45/60/90/120°	145*H180mm	24W	8/15/25/30 /45/60/90/120°	215*H180mm	12W	8/15/25/30 /45/60/90/120°	180*H80mm
18W		180*H190mm	50W		300*H240mm	18W		210*H80mm
36W		230*H250mm	72W		300*H240mm	36W		250*H80mm



MODEL

TAY-RUWL



MODEL


TAY-GUWL



MODEL

TAY-GUWL3

WATTAGE	BEAM ANGLE	SIZE(mm)	WATTAGE	BEAM ANGLE	SIZE(mm)	WATTAGE	BEAM ANGLE	SIZE(mm)
6W		130*H85mm	6W		230*H48mm	6W		D178*H96mm
9W	8/15/25/30 /45/60/90/120°	160*H85mm	12W	120°	230*H48mm	9W	120°	D178*H96mm
12W		160*H85mm	24W		300*H70mm	12W		D178*H96mm

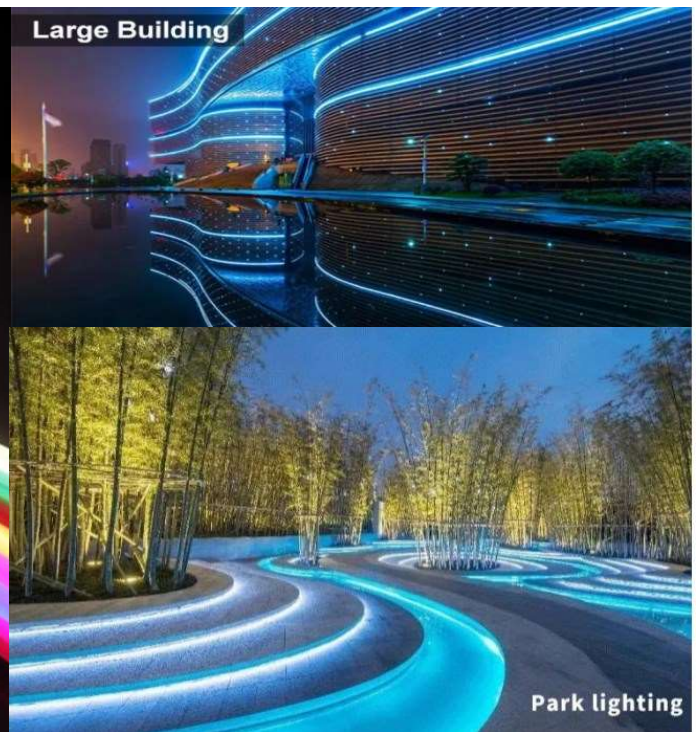

LED STRIP LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.

PERFORMANCE

- Rated lifetime L80: 30,000 hours
- 3000-6500K CCT, R,G,B,Y,RGB, RGBW, RGBWW;
- CRI: 80 ; IP: IP20/IP65/67/68
- CCT dimmable available;
- Lume: 100 LM/W;
- Material: Eco PVC or Silicone;


ELECTRICAL

- Input Voltage: AC110/220V 50/60Hz Or 12V/DC24V
- Beam angle: 120degree
- Driver Efficiency: >90%
- Power Factor: >0.9
- THD<15%

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium alloy heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature .
- -20℃ ~ +60℃ storage temperature

INSTALLATION

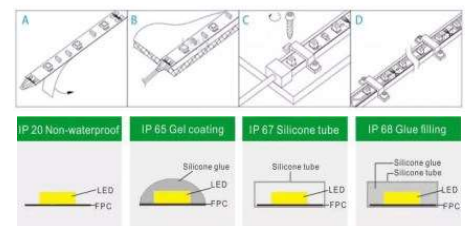


MODEL	MODEL	MODEL	MODEL	MODEL	MODEL
	TAY-STL220V		TAY-CCTSTL		TAY-STL5050
	TAY-STL2835		TAY-STLCOB		

LEDS	IP	LEDS	IP	LEDS	IP	LEDS	IP	LEDS	IP
60LED/M	IP65	60LED/M	IP20/IP65/IP67	60LED/M	IP20/IP65/IP67	60LED/M	IP20/IP65/IP67	320LED/M	IP20/IP65/IP67
120LED/M	IP65	120LED/M	IP20/IP65/IP67	120LED/M	IP20/IP65/IP67	120LED/M	IP20/IP65/IP67	560LED/M	IP20/IP65/IP67
180LED/M	IP65	180LED/M	IP20/IP65/IP67	180LED/M	IP20/IP65/IP67				
240LED/M	IP65	240LED/M	IP20/IP65/IP67	240LED/M	IP20/IP65/IP67				

MODEL	MODEL	MODEL
	TAY-NL220V	
	TAY-NL360	

LEDS	IP	LEDS	IP	LEDS	IP
60LED/M	IP67	60LED/M	IP67/IP68	60LED/M	IP67/IP68
120LED/M	IP67	120LED/M	IP67/IP68	120LED/M	IP67/IP68
180LED/M	IP67	180LED/M	IP67/IP68	180LED/M	IP67/IP68
240LED/M	IP67	240LED/M	IP67/IP68	240LED/M	IP67/IP68

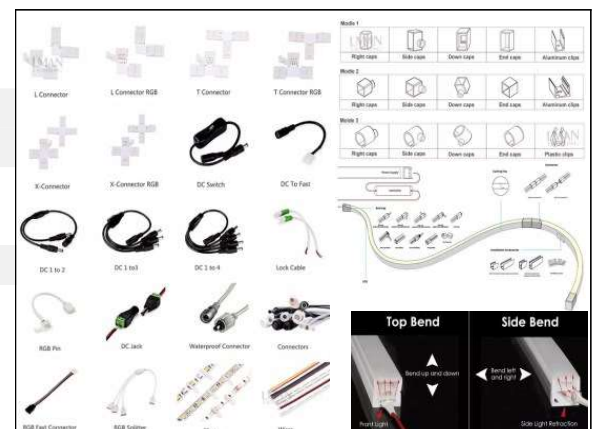



LED EXIT LIGHT

LISTINGS

- Advanced super longlife and stable driver.
- No delay on start, no warm up time required, no noise, no flickering.
- No UV or IR radiation in the beam, mercury free, lead free.

PERFORMANCE

- High temperature Battery: NI-Cd /NI-MH 3.6V 1200 Amh
- Duration time: >3 hours
- Monitors: Manual test&Automatic test optional
- Operation: Maintained
- View distance: 30M
- Protection Class: Class 1
- Working Temperature: 0°C to +40°C
- IP : IP40

ELECTRICAL

- Input Voltage: AC220/220V 50/60Hz
- Beam angle: 120degree
- Emergency: 1/2/3HS

CONSTRUCTION

- Lightweight construction allows for quick and easy installation
- Magnesium Steel Body with Acrylic heatsink for cooler operating temperatures
- -35℃ ~ +55℃ operating temperature
- -20℃ ~ +60℃ storage temperature

	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-EX2		TAY-EX9		TAY-EX10		TAY-EX6		TAY-EX7	
Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)
5W	L380*W165*H35mm	5W	L395*W85*H195mm	5W	L310*W175*H45mm	5W	L350*W220*H40mm	5W	L370*W225*H47mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-EX1		TAY-EX1A		TAY-EX3		TAY-EX5		TAY-EX8	
Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)
5W	L295*W190*H40mm	5W	L295*W190*H40mm	5W	L345*W110*H170mm	5W	L390*W190*H60mm	5W	L323*W273*H42mm
	MODEL		MODEL		MODEL		MODEL		MODEL
TAY-EM1		TAY-CEM		TAY-EM2		TAY-EM3		TAY-EM4	
Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)	Wattage	SIZE(mm)
5W	L365*W165*H55mm	5W	D108*H34mm	8W	L320*W115*H100mm	8W	L300*W135*H90mm	8W	L265*W285*H60mm

LIGHT SOURCES

				
E27 A60 LAMP	E27 POWER LAMP	E27 FILAMENT LAMP	E14 FILAMENT	E14 CANDEL
				
G45 LAMP	E27 STICK LAMP	E14/E24 STICK	G9 LED LAMP	G4 LED LAMP
				
LED PLC LAMP	R80	GU10	MR16	GX53
				
T8 LED TUBE	T5 LED TUBE	AR111 LED LAMP	PAR38 LED	G12
				
SENSOR LAMP	B22 LED	7002	ST64 LED LAMP	001/1PWH
				
LED MODUL	LED MODUL RD	COB CHIP	LED MODUL	DRIVER
				
E27 3U CFL	7004	7002	EMERGENCY LAMP	INSERT KILLAR LAMP
				
E40 MATEL HALIDE	RS7	G12	E40 MH	E27 NIGHT LAMP

Thank You



TAREEQ AL YARMOOK LIGHTING EQUIP. TR

P.O. BOX: 29355, AL ROLLA, SHARJAH, U.A.E.

TLE: +971 6 5743707 FAX : +971 6 5743707

MOBI. : +971 557984595

Email: alyarmooklighting@gmail.com

Web : www.taylighting.org